




ineo 368e

- > Black & white A3 multifunctional
- > Up to 36 ppm

Option diagram

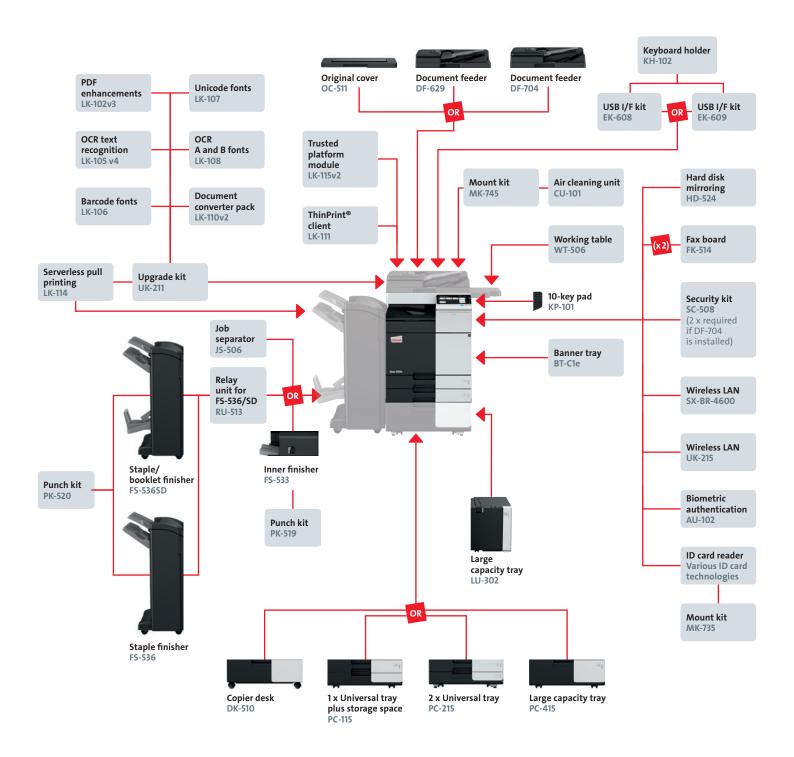

Finishing functionalities



Corner

stapling





Two-hole punching



Duplex

















Two-point stapling

Four-hole punching

Combined mixplex/ mixmedia

Half-fold

Sheet insertion, report

Letterfold Booklet

Offset sorting

Description

ineo 368e	A3 multifunctional with 36 ppm b/w. Standard ineo print controller with PCL 6, PCL 5, PostScript 3, PDF 1.7, XPS and OOXML support. Paper capacity of 500 + 500 sheets and 150-sheet manual bypass. Media from A6 to SRA3, 1.2 m banner and 52 – 300 g/m². 2 GB memory, 250 GB hard disk and Gigabit Ethernet standard.
DF-629 Document feeder	Reversing automatic document feeder, capacity 100 originals
DF-704 Document feeder	Dualscan automatic document feeder, capacity 100 originals
OC-511 Original cover	Cover instead of ADF
PC-115 1 x Universal tray	A5–A3, 500 sheets, 52–256 g/m²
PC-215 2 x Universal tray	A5–A3, 2 x 500 sheets, 52–256 g/m²
PC-415 Large capacity tray	A4, 2,500 sheets, 52–256 g/m²
DK-510 Copier desk	Provides storage space for print media and other materials
LU-302 Large capacity tray	A4, 3,000 sheets, 52–256 g/m ²
FS-533 Inner finisher	50-sheet stapling, 500 sheets max. output
PK-519 Punch kit for FS-533	2/4 hole punching, autoswitching
FS-536 Staple finisher	50-sheet stapling, 3,200 sheets max. output
FS-536SD Booklet finisher	50-sheets staple finisher, 20-sheets booklet
	finisher, 2,200 sheets max. output
RU-513 Relay unit	For FS-536/SD installation
for FS-536/SD	(Max. 100 sheets output capacity)
PK-520 Punch kit for FS-536/SD	2/4 hole punching, autoswitching
JS-506 Job separator	Separation for fax output etc.
KP-101 10-Key pad	For use instead of touchscreen
WT-506 Working table	Authentication device placement

FK-514 Fax board	Super G3 fax, digital fax functionality
KH-102 Keyboard holder	To place USB keyboard
EK-608 USB I/F kit	USB keyboard connection
EK-609 USB I/F kit	USB keyboard connection, Bluetooth
ID card reader	Various ID card technologies
MK-735 Mount kit	Installation kit for ID card reader
AU-102 Biometric authentication	Finger vein scanner
SC-508 Security kit	Copy Guard function
	(2 kits required if DF-704 is installed)
HD-524 Hard disk mirroring	Back-up HDD
BT-C1e Banner tray	Multipage banner feeding
LK-102v3 PDF enhancements	PDF/A (1b), PDF encryption, digital signature
LK-105v4 OCR text recognition	Searchable PDF and PPTX, PDF/A (1a)
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document	Generates various file formats incl. DOCX, XLSX
converter pack	and PDF/A
LK-111 ThinPrint® Client	Print data compression for reduced network impact
LK-114 Serverless pull printing	Secure and Follow Me printing solution
	requiring no server application. Host devices
	require 4GB memory.
LK-115v2 TPM activation	Trusted Platform Module for protection of data
	encryption and decryption
UK-211 Upgrade kit	2 GB memory extension for upgrades
UK-215 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
SX-BR-4600 Wireless LAN	Wireless LAN to network connector
MK-745 Mount kit	Installation kit for CU-101
CU-101 Air cleaning unit	Improving indoor air quality by reduced emissions

Technical specifications

System specifications

Panel size/resolution	9" / 800 x 480
System memory	2,048 MB / 4,096 MB
(standard/max)	
System hard disk	250 GB (standard)
Interface	10-Base-T/100-Base-T/1,000-Base-T Ethernet;
	USB 2.0 Wi-Fi 802.11b/g/n (optional)
Network protocols	TCP/IP (IPv4 / IPv6); NetBEUI;
	SMB; LPD; IPP; SNMP; HTTP
Automatic document feeder	Up to 100 originals; A6–A3; 50–163 g/m²
(optional)	RADF or Dualscan ADF available
Printable paper size	A6-SRA3; customised paper sizes;
	banner paper max. 1,200 x 297 mm
Printable paper weight	52-300 g/m²
Paper input capacity	1,150 sheets/6,650 sheets
(standard/max)	
Paper tray input (standard)	1x 500 sheets; A5–A3; custom sizes; 52–256 g/m ²
	1x 500 sheets; A5–SRA3; custom sizes; 52–256 g/m ²
Paper tray input (optional)	1x 500 sheets; A5–A3; 52–256 g/m²
	2x 500 sheets; A5–A3; 52–256 g/m²
	1x 2,500 sheets; A4; 52–256 g/m²
Large capacity tray (optional)	1x 3,000 sheets; A4; 52–256 g/m²
Manual bypass	150 sheets; A6–SRA3; custom sizes; banner;
	60-300 g/m²
Automatic duplexing	A6 portrait; A5–SRA3; 52–256 g/m²
Finishing modes (optional)	Offset; group; sort; staple; punch; half-fold;
	letter-fold; booklet
Output capacity (standard)	Max. 250 sheets
Output capacity (optional)	Max. 3,300 sheets
Stapling	Max. 50 sheets or
	48 sheets + 2 cover sheets (up to 209 g/m²)
Stapling output capacity	Max. 1,000 sheets

Letter fold	Max. 3 sheets
Letter fold capacity	Max. 30 sheets; unlimited (without tray)
Booklet	Max. 20 sheets or
	19 sheets + 1 cover sheet (up to 209 g/m²)
Booklet output capacity	Max.: 100 sheets; unlimited (without tray)
Copy/print volume (monthly)	Rec.: 13,000 pages; Max.1: 175,000 pages
Toner lifetime	Up to 25,000 pages
Imaging unit lifetime	Up to 270,000/600,000 pages (drum/developer)
Power consumption	220-240 V / 50/60 Hz; Less than 1.58 kW (system)
System dimensions (W x D x H)	615 x 725 x 779 mm (without options)
System weight	Approx. 76.5 kg (without options)
Printer specifications	
Print resolution	1,800 x 600 dpi; 1,200 x 1,200 dpi
Page description language	PCL 6 (XL 3.0); PCL 5; PostScript 3 (CPSI 3016); XPS

Print resolution	1,800 x 600 dpi; 1,200 x 1,200 dpi
Page description language	PCL 6 (XL 3.0); PCL 5; PostScript 3 (CPSI 3016); XPS
Operating System	Windows 7 (32/64); Windows 8/8.1 (32/64);
	Windows 10 (32/64); Windows Server 2008 (32/64);
	Windows Server 2008 R2; Windows Server 2012;
	Windows Server 2012 R2; Windows Server 2016;
	Macintosh OS X 10.8 or later; Unix; Linux
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Print functions	Direct print of PCL, PS, TIFF, XPS, PDF (v1.7),
	encrypted PDF files and OOXML (DOCX, XLSX,
	PPTX); mixmedia and mixplex; "Easy Set" job
	programming; overlay; watermark; copy
	protection; carbon copy print
Mobile Printing	AirPrint (iOS); Mopria (Android);
	ineoPRINT (iOS/Android/Windows 10 Mobile);
	Mobile Authentication and Pairing (iOS/Android)
	optional: Google Cloud Print; WiFi Direct

_				
Scanner	cn	eciti	cati	nnc
Jeanne	30	CCIII	Cati	0113


Scan speed (mono/colour)	Up to 160 ipm (with optional document feeder)
Scan resolution	Max.: 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB
	(Scan-to-Home); Scan-to-FTP; Scan-to-Box;
	Scan-to-USB; Scan-to-WebDAV; Scan-to-DPWS;
	Scan-to-URL; TWAIN scan
File formats	JPEG; TIFF; PDF; compact PDF; encrypted PDF; XPS;
	compact XPS; PPTX
	optional: searchable PDF; PDF/A 1a and 1b;
	searchable DOCX/PPTX/XLSX
Scan destinations	2,100 (single + group); LDAP support
Scan functions	Annotation (text/time/date) for PDF; up to 400 job
	programs; real-time scan preview

Conjer specifications

copier specifications	
Imaging technology	Laser
Toner technology	HD polymerised toner
Copy/print speed A4	Up to 36 ppm
Copy/print speed A3	Up to 17 ppm
Autoduplex speed A4	Up to 36 ppm
1st copy out time	4.5 sec.
Warm-up time	Approx. 20 sec. ²
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1–9,999
Original format	A5–A3; custom sizes
Magnification	25–400% in 0.1% steps; auto-zooming
Copy functions	Chapter; cover and page insertion; proof copy (print and screen); adjustment test print; digital art func- tions; job setting memory; poster mode; image repeat; overlay; stamping; copy protection

Fax specifications

. ax speemeations	
Fax standard	Super G3 (optional)
Fax transmission	Analogue; i-Fax; Colour i-Fax; IP-Fax
Fax resolution	Up to 600 x 600 dpi (ultra-fine)
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,100 (single + group)
Fax functions	Polling; time shift; PC-Fax; receipt to confidential
	box; Receipt to e-mail/FTP/SMB; up to 400 job
	programs



Storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public; Personal (with password or authentication);
	Group (with authentication)
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt;
	Fax polling
User box functionality	Reprint; combination; Download; Sending (e-mail/
•	FTP/SMB and Fax); Copy box to box
System features	
Security	ISO15408 Common Criteria (in evaluation);
	IP filtering and port blocking; SSL2; SSL3 and
	TLS10/11/12 network communication; IPsec support;
	IEEE 802.1x support; User authentication; Authen-
	tication log; Secure print; Kerberos; Hard disk over-
	write (8 standard types); Hard disk data encryption
	(AES 256); Memory data auto deletion; Confidential
	fax receipt; Print user data encryption
	optional: Hard disk mirroring; Copy protection
	(Copy Guard, Password Copy)
Accounting	Up to 1,000 user accounts; Active Directory support
	(user name + password + e-mail + smb folder);
	User function access definition; Authentication by
	mobile device (Android/iOS)
	optional: Biometric authentication (finger vein
	scanner); ID card authentication (ID card reader)
Software	store+find (opt.); convert+share (opt.); Personal
	Applications (opt.); Device Manager (opt.); Data
	Administrator (user accounts & cost centres); Card
	solutions (opt.); Unix/Linux support; SAP support;
	EveryonePrint (opt.)

- $^{\mbox{\scriptsize 1}}\,$ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed
- ² Warm-up time may vary depending on the operating environment and usage

































Konica Minolta Business Solutions Europe GmbH

Europaallee 17 30855 Langenhagen Germany Phone +49 511 7404-0 www.develop.eu

For more information regarding the ineo 368e please refer to the respective product homepage



- All specifications refer to A4-size paper of 80 g/m² quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page $coverage\ for\ a\ particular\ page\ size\ (6\%\ coverage\ of\ A4).\ The\ actual\ life\ of\ each\ consumable\ will\ vary$ $depending \ on \ use \ and \ other \ printing \ variables \ including \ page \ coverage, \ page \ size, \ media \ type,$ continuous or intermittent printing, ambient temperature and humidity.

 - Specifications and accessories are based on the information available at the time of printing and are
- subject to change without notice.
- DEVELOP and ineo are registered trademarks/product titles owned by Konica Minolta Business Solutions Europe GmbH.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- $\hbox{-} \ \ All \ brand \ and \ product \ names \ may \ be \ registered \ trademarks \ or \ trademarks \ of \ their \ respective \ holders \ and$ are hereby acknowledged.