

DEVELOP

Dynamic balance


www.develop.eu



ineo 4422



- > Black & white
A4 multifunctional
- > Up to 44 ppm

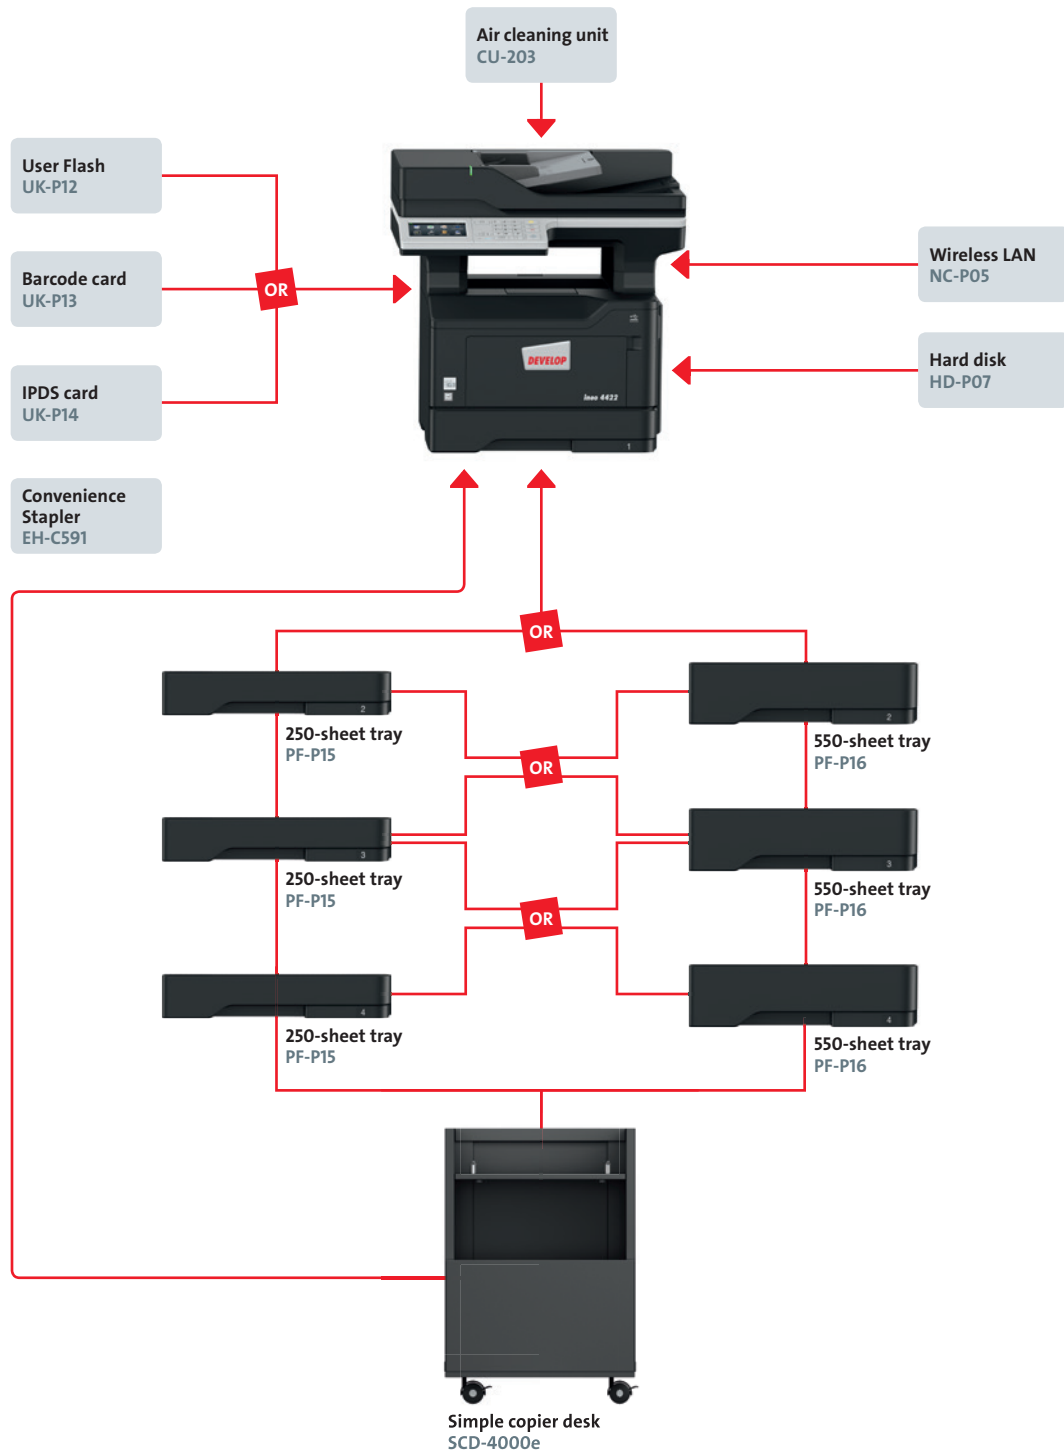

Finishing functionalities



Duplex



Corner stapling (off-line)

ineo 4422

A4 multifunctional with 44 ppm b/w. Standard print controller with PCL 5/6, PostScript 3 and XPS support. Paper capacity of 250 sheets and 100-sheet manual bypass. Media from A6 to A4 and 60–216 g/m². 1 GB memory and Gigabit Ethernet standard

PF-P15 Paper tray	A5–A4, 250 sheets, 60–120 g/m ²
PF-P16 Paper tray	A5–A4, 550 sheets, 60–120 g/m ²
SCD-4000e Copier desk	Ensures ergonomic height and provides storage space for print media, etc.

UK-P12 User flash	256 MB User flash for storing fonts, forms and macros or to save job account log
UK-P13 Barcode card	Printer-based electronic barcode engine
UK-P14 IPDS card	Provides compatibility for IPDS printing
NC-P05 Wireless LAN	Wireless LAN to network connector
CU-203 Air cleaning unit	Improving indoor air quality by reduced emissions
HD-P07 Hard disk	500 GB HDD to collate larger jobs or enable Proof Copy, Scan Preview or booklet creation in copy mode
EH-C591 Convenience stapler	Convenient stapling of up to 50 prints per set

Technical specifications

SYSTEM SPECIFICATIONS

Panel size/resolution	4.3" / 480 x 272
System memory	1 GB (standard)
System hard disk	500 GB (optional)
Interface	10-Base-T/100-Base-TX/1,000-Base-T Ethernet; USB 2.0; Wi-Fi 802.11b/g/n (optional)
Network protocols	TCP/IP (IPv4 / IPv6); UDP; AppleTalk; SMB; LPD; IPP; SNMP; HTTP/S
Automatic document feeder	Up to 50 originals; A6–A4; 52–120 g/m ² ; RADF
Printable paper size	A6–A4, customised paper sizes
Printable paper weight	60–216 g/m ²
Paper input capacity	Standard: 350 sheets; Max.: 2,000 sheets
Paper tray input (standard)	250 sheets, A6–A4, 60–120 g/m ²
Paper tray input (optional)	3x 250/550 sheets; A5–A4; 60–120 g/m ²
Manual bypass	100 sheets, A6–A4, custom sizes, 60–216 g/m ²
Automatic duplexing	A4; 60–90 g/m ²
Output capacity	Max.: 150 sheets
Copy/print volume (monthly)	Rec.: 7,000 pages; Max. ¹ : 120,000 pages
Toner lifetime	25,000 pages
Imaging unit lifetime	60,000 pages
Power consumption	220–240 V / 50/60 Hz; Less than 630 W
System dimensions (W x D x H)	489 x 429.5 x 477 mm
System weight	Approx. 20.6 kg

COPIER SPECIFICATIONS

Copying process	Electrostatic laser
Copy/print speed A4	Up to 44 ppm
Autoduplex copy/print speed A4	Up to 23 ppm
1st copy out time	6.0 sec.
Copy resolution	600 x 600 dpi
Multicopy	1–999
Original format	A6–A4
Magnification	25–400%
Copy functions	Duplex; 2-in-1; 4-in-1; page insertion; overlay; booklet (opt.); electronic sorting; ID copy; proof copy (opt.); margin shift; cover page; background removal

PRINTER SPECIFICATIONS

Print resolution	1,200 x 1,200 dpi
Page description language	PCL 5/6; PostScript 3; XPS
Operating systems	Windows 7 (32/64); Windows 8/8.1 (32/64); Windows 10 (32/64); Windows Server 2008 (32/64); Windows Server 2008 R2; Windows Server 2012; Windows Server 2012 R2; Windows Server 2016; Macintosh OS X 10.9 or later; Linux
Printer fonts	89 PCL Latin; 158 PostScript 3 Emulation Latin
Print functions	Duplex; n-up; watermark; cover sheet; electronic sorting; secure print; USB direct print (PDF v1.7; TIFF; JPEG; GIF; BMP; PNG; XPS)
Mobile Printing	AirPrint (iOS), Mopria (Android), Google Cloud Print, ineoPRINT (iOS/Android/Windows 10 Mobile) optional: Wifi Direct

SCANNER SPECIFICATIONS

Scan speed (mono/colour)	Up to 42/20 ipm
Scan resolution	Max.: 600 x 600 dpi
Scan modes	Scan-to-eMail; Scan-to-FTP; Scan-to-SMB; Scan-to-USB; Network TWAIN scan
File formats	PDF; TIFF; JPEG; XPS
Scan function	Scan preview (opt.)

FAX SPECIFICATIONS

Fax standard	Super G3
Fax transmission	Analogue
Fax resolution	Max.: 600 x 600 dpi (ultra-fine)
Fax compression	MH; MR; MMR; JBIG; JPEG
Fax modem	Up to 33.6 Kbps
Fax destinations	400
Fax functions	Time shift; PC-Fax; up to 500 job programs; block Junk Fax; banned fax list; scan preview (opt.); fax forwarding; fax server support

SYSTEM FEATURES

Security	SNMPv3; HTTPS; IPsec support; TCP/UDP port disabling; IEEE 802.1x support; secure print (print hold/PIN); certificate management; SMTP authentication
Software	Device Manager (opt.)

Cartridge Return Program

DEVELOP Return Program cartridges are patented print cartridges sold at a discount in exchange for the customer's agreement to the license requirement that the cartridges will be used only once and returned only to manufacturer for remanufacturing or recycling. These patented cartridges are licensed for single use only and will stop working after delivering a fixed amount of toner. Toner may remain in the cartridge when replacement is required.

Replacement cartridges sold without these restrictions (non-returnable cartridges) are also available. Please contact a DEVELOP representative for further details and availability.



DEVELOP

Konica Minolta Business Solutions Europe GmbH
 Europaallee 17 30855 Langenhagen Germany Phone +49 511 7404-0 www.develop.eu

For more information regarding the ineo 4422 please refer to the respective product homepage



- All specifications refer to A4-size paper of 80 g/m² quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- DEVELOP and ineo are registered trademarks/product titles owned by Konica Minolta Business Solutions Europe GmbH.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.